

**Ingoldstadt, Germany**

2015/2016

**3 Trickling Filters**

D=38m (125') x H=3m (10')

V=3.500m<sup>3</sup> (123.000cu.ft) each

**HEWiFILL** CF19 / CF12

**Application**

BOD removal / Nitrification

**Contact:**

Operator Mr. Gander +49 (0) 841 305-465-0



**Kempton, Germany**

2008

**2 Trickling Filters**

D=36m (118') x H=4m (13')

V=4000m<sup>3</sup> (141.000cu.ft) each

**HEWiFILL** CF12

**Application**

Nitrification and simultaneous gas scrubbing

**Contact:**

Operator Mr. Beer +49 (0) 8374 5834-0



**Öhringen, Germany**

2010

**1 Trickling Filter**

D=15m (49') x H=6m (20')

V= 1.060m<sup>3</sup> (37.000cu.ft)

**HEWiFILL** CF19

**Application**

BOD removal / partial nitrification

**Contact:**

Operator Mr. Holtermann +49 (0) 7941 9263-0



**Ashford, Southern Water, United Kingdom**

2013

**1 Trickling Filter**

D=20.9m (68') x H=5.185m (17')

V= 1733m<sup>3</sup> (61.000cu.ft)

**HEWiFILL** CF15

**Application**

Nitrification

**Contact:**

Operator BTU Barhale Tarnt Utilities



**Garching, Germany**

2018/2019

3 Trickling Filters

D=17m (56') x H=4,6m (15')

V= 1.000m<sup>3</sup> (35.000cu.ft) each

**HEWiFILL** CF19 / CF12

**HEWiPIER** support structure

Support Structure

**Application**

Nitrification



**Contact:**

Operator: +49 (0) 3294784

**Nhlangano, Swaziland**

2018/2019 Under construction

4 Trickling filters

D=20m (66') x H = 3,4m (11')

V= 1050m<sup>3</sup> (37.000 cu.ft) each

**HEWiFILL** CF19 / CF27

**HEWiPIER** support structure

**Application**

BOD-removal , Nitrification, Denitrification



Contact:

Contractor: Mr Kellermann, +27 82 460 8304

**Huyton WwTW , United Utilities, United Kingdom**

2015

1 Trickling Filter

D=14.2m (46') x H=4.8m (16')

V= 866m<sup>3</sup> (30.500cu.ft)

**HEWiFILL** CF19

**Application**

Nitrification



**Contact:**

Operator Nomenca

**Dukinfield, United Utilities, United Kingdom**

2017/2018

4 Trickling Filter

D=13.25m (43') x H=4.8m (16')

V= 662m<sup>3</sup> each (23.300cu.ft)

**HEWiFILL** CF19 / CF27

**Application**

Nitrification



**Contact:**

Operator Eric Wright Water

**Menagwins , South-West-Water, United Kingdom**

2019

1 Trickling Filter

D=35m (114') x H=4.8m (16')

V= 4690m<sup>3</sup> (165.300cu.ft)


**HEWiFILL** CF19

**HEWiPIER** support structure

**Application**

BOD removal / partial nitrification

**Contact:**

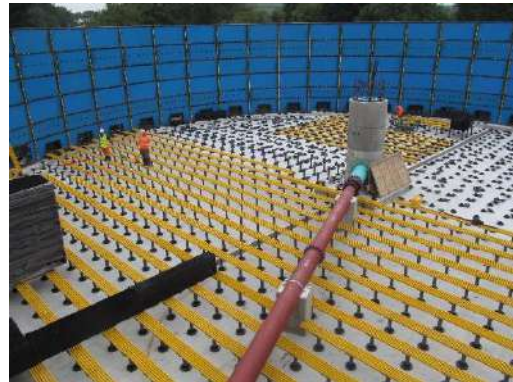

**Faringdon, Seven Trent Water, UK**

2019 / under construction

2 Trickling Filters

D = 13,66m ( 45') x H = 3,3m (11')

V = 970 m<sup>3</sup> (34.000cu.ft)

**HEWiFILL** CF27

**Application**

BOD removal

**Contact:**



**Kilgore, TX, USA**

2019

1 Trickling Filter

D = 26 m ( 85') x H = 1,2m (4')

V = 636m<sup>3</sup> (22.700cu.ft)

**HEWiFILL** CF19 (upper layer rehab)

**Application**

BOD removal

**Contact:**

Jordan Digiacomio



**Soc Tran City, Vietnam**

2019 / under construction

2 Trickling Filters

D = 24,2 m ( 79,3') x H = 5,5 m (18')

V = 2530m<sup>3</sup> (89117 cu.ft)

**HEWiFILL** CF19

**HEWiPIER** support structure


**Application**

BOD removal

**Contact:**

Seen Technologies

+84.24.3765 9660

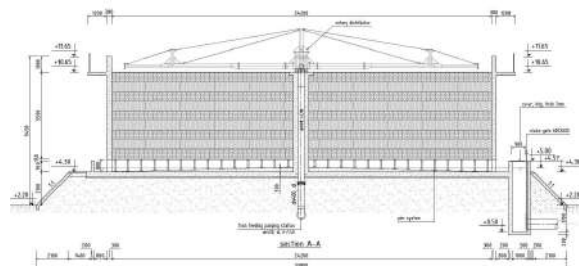



**Cooperstown, USA**

2020

1 Trickling Filter

D = 18,3 m ( 60) x H = 2,4 m (8')

V = 640m<sup>3</sup> (22617 cu.ft)

**HEWiFILL 27**

**HEWiPIER** support structure

**Application**

BOD removal

**Contact:**

Chris Harden, +1(540)5203291

